


PROBLEM 6.2:



$$y[n] = (x[n])^2$$

(a)  $x[n] = Ae^{j\varphi}e^{j\hat{\omega}n}$

$$y[n] = (Ae^{j\varphi}e^{j\hat{\omega}n})^2 = A^2e^{j2\varphi}e^{j2\hat{\omega}n}$$

(b) NO.

The output cannot be written as

$$y[n] = \mathcal{X}(\hat{\omega}) Ae^{j\varphi}e^{j\hat{\omega}n}$$

because the frequency has changed

The new freq. is  $2\hat{\omega}$

# **PROBLEM 6.5:**





$$y[n] = x[n] + 2x[n-1] + x[n-2]$$

(a) use filter coeffs:  $\{b_k\} = \{1, 2, 1\}$

$$H(\hat{\omega}) = 1 + 2e^{-j\hat{\omega}} + e^{-j2\hat{\omega}}$$

$$(b) H(\hat{\omega}) = e^{-j\hat{\omega}}(e^{j\hat{\omega}} + 2 + e^{-j\hat{\omega}}) = e^{-j\hat{\omega}}(2 + 2\cos\hat{\omega})$$

phase =  $-\hat{\omega}$       MAG =  $2 + 2\cos\hat{\omega}$        $|H| = 4$  at  $\hat{\omega} = 0$   
 AT  $\hat{\omega} = \pi/2$ ,  $|H| = 2$   
 AT  $\hat{\omega} = \pi$ ,  $|H| = 0$

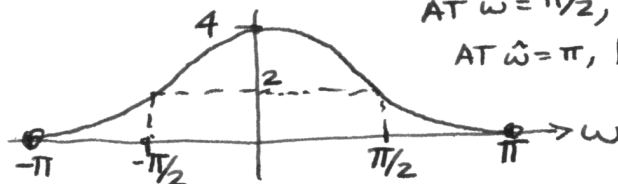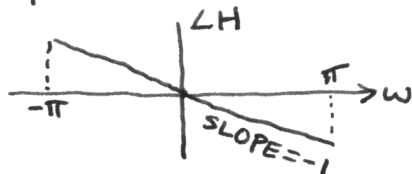

$$(c) x[n] = 10 + 4\cos\left(\frac{\pi}{2}n + \frac{\pi}{4}\right)$$

$$= 10 + 2e^{j\pi/4}e^{j\pi/2n} + 2e^{-j\pi/4}e^{-j\pi/2n}$$


$$y[n] = 10H(0) + H(\pi/2)2e^{j\pi/4}e^{j\pi/2n} + 2H(-\pi/2)e^{-j\pi/4}e^{-j\pi/2n}$$

$$H(0) = 4e^{j0} \quad H(\pi/2) = e^{-j\pi/2}(2) \quad H(-\pi/2) = 2e^{j\pi/2}$$

$$\Rightarrow y[n] = 40 + 4e^{-j\pi/2}e^{j\pi/4}e^{j\pi/2n} + 4e^{j\pi/2}e^{-j\pi/4}e^{-j\pi/2n}$$

$$= 40 + 8\cos\left(\frac{\pi}{2}n - \frac{\pi}{4}\right)$$

$$(d) x[n] = \delta[n] \Rightarrow y[n] = \delta[n] + 2\delta[n-1] + \delta[n-2]$$

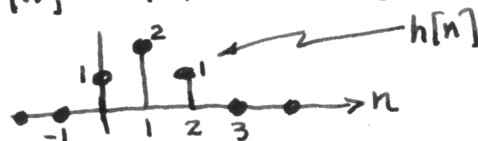

$$(e) x[n] = u[n]$$

$$y[n] = u[n] + 2u[n-1] + u[n-2]$$


$$y[n] = 0 \text{ for } n < 0$$

$$y[0] = u[0] + 2u[-1] + u[-2] = 1 + 0 + 0 = 1$$

$$y[1] = u[1] + 2u[0] + u[-1] = 1 + 2 + 0 = 3$$

$$y[2] = u[2] + 2u[1] + u[0] = 1 + 2 + 1 = 4$$

$$y[n] = 4 \text{ for } n \geq 2.$$



### PROBLEM 6.7:

(a)  $H(e^{j\hat{\omega}}) = 1 + 2e^{-j3\hat{\omega}}$

*Solution:* Use the fact that the frequency response for  $\delta[n - n_0]$  is  $H(e^{j\hat{\omega}}) = e^{-j3\hat{\omega}}$ .

$$h[n] = \delta[n] + 2\delta[n - 3]$$

(b)  $H(e^{j\hat{\omega}}) = 2e^{-j3\hat{\omega}} \cos(\hat{\omega})$

*Solution:* Use the inverse Euler formula to write the frequency response in terms of complex exponentials.

$$H(e^{j\hat{\omega}}) = 2e^{-j3\hat{\omega}} \cos(\hat{\omega}) = e^{-j3\hat{\omega}} (e^{j\hat{\omega}} + e^{-j\hat{\omega}})$$

$$H(e^{j\hat{\omega}}) = e^{-j2\hat{\omega}} + e^{-j4\hat{\omega}}$$

$$\Rightarrow h[n] = \delta[n - 2] + \delta[n - 4]$$

(c)  $H(e^{j\hat{\omega}}) = e^{-j4.5\hat{\omega}} \frac{\sin(5\hat{\omega})}{\sin(\hat{\omega}/2)}$

*Solution:* Use the fact that the frequency response for an  $L$ -point running sum filter is:

$$H_L(e^{j\hat{\omega}}) = e^{-j\hat{\omega}(L-1)/2} \frac{\sin(L\hat{\omega}/2)}{\sin(\hat{\omega}/2)}$$

Thus, we see that  $L/2 = 5$ , or  $L = 10$ , and we can rewrite the frequency response as

$$H(e^{j\hat{\omega}}) = e^{-j\hat{\omega}(10-1)/2} \frac{\sin(10\hat{\omega}/2)}{\sin(\hat{\omega}/2)}$$

because  $(L - 1)/2$  is equal to 4.5 when  $L = 10$ . Having made these identifications in the formula for  $H(e^{j\hat{\omega}})$ , we get the impulse response of the 10-point running-sum filter:

$$\begin{aligned} h[n] &= u[n] - u[n - 10] \\ &= \delta[n] + \delta[n - 1] + \delta[n - 2] + \delta[n - 3] + \delta[n - 4] \dots \\ &\quad + \delta[n - 5] + \delta[n - 6] + \delta[n - 7] + \delta[n - 8] + \delta[n - 9] \end{aligned}$$



# PROBLEM 6.9:

$$\begin{aligned}
 (a) \quad \mathcal{H}(\hat{\omega}) &= (1 - e^{-j\hat{\omega}}) \left( 1 - 2(0.5) \cos \frac{\pi}{6} e^{-j\hat{\omega}} + (0.5)^2 e^{-j2\hat{\omega}} \right) \\
 &= (1 - e^{-j\hat{\omega}}) \left( 1 - \frac{\sqrt{3}}{2} e^{-j\hat{\omega}} + \frac{1}{4} e^{-j2\hat{\omega}} \right) \\
 &= 1 - \underbrace{\frac{1}{2}(\sqrt{3}+2)}_{-1.866} e^{-j\hat{\omega}} + \underbrace{\left(\frac{1}{4} + \frac{\sqrt{3}}{2}\right)}_{1.116} e^{-j2\hat{\omega}} - \frac{1}{4} e^{-j3\hat{\omega}}
 \end{aligned}$$

Difference Equation:

$$y[n] = x[n] - 1.866x[n-1] + 1.116x[n-2] - \frac{1}{4}x[n-3]$$

(b) When  $x[n] = \delta[n]$ ,  $y[n] = h[n]$  impulse response

$$h[n] = \delta[n] - 1.866\delta[n-1] + 1.116\delta[n-2] - \frac{1}{4}\delta[n-3]$$

(c) Find  $\hat{\omega}$  where  $\mathcal{H}(\hat{\omega}) = 0$

The only frequency is  $\hat{\omega} = 0$ , because then the factor  $(1 - e^{-j\hat{\omega}}) = 0$ . The other two factors in  $\mathcal{H}(\hat{\omega})$  are never zero for  $-\pi \leq \hat{\omega} \leq \pi$ .

PROBLEM 6.13:



$$\begin{aligned}
 (a) \quad y[n] &= y_3[n] = x_3[n-1] + x_3[n-2] & x_3[n] &= y_2[n] \\
 &= y_2[n-1] + y_2[n-2] \\
 &= (x_2[n-1] + x_2[n-3]) + (x_2[n-2] + x_2[n-4])
 \end{aligned}$$

Now replace  $x_2[n]$  with  $y_1[n]$

$$\begin{aligned}
 y[n] &= y_1[n-1] + y_1[n-2] + y_1[n-3] + y_1[n-4] \\
 &= (x_1[n-1] - x_1[n-2]) + (x_1[n-2] - x_1[n-3]) \\
 &\quad + (x_1[n-3] - x_1[n-4]) + (x_1[n-4] - x_1[n-5])
 \end{aligned}$$

$\xrightarrow{\text{CANCEL}}$

$$y[n] = x_1[n-1] - x_1[n-5]$$

$$x_1[n] = x[n]$$

$$y[n] = x[n-1] - x[n-5]$$

(b) Same thing as part (a) but use  $\mathcal{H}_i(\hat{\omega})$

$$\mathcal{H}_1(\hat{\omega}) = 1 - e^{-j\hat{\omega}}$$

$$\mathcal{H}_2(\hat{\omega}) = 1 + e^{-j2\hat{\omega}}$$

$$\mathcal{H}_3(\hat{\omega}) = e^{-j\hat{\omega}} + e^{-j2\hat{\omega}}$$

} Multiply these together

$$\mathcal{H}_6(\hat{\omega}) = \mathcal{H}_1(\hat{\omega})\mathcal{H}_2(\hat{\omega})\mathcal{H}_3(\hat{\omega})$$

$$= (1 - e^{-j\hat{\omega}})(1 + e^{-j2\hat{\omega}})(e^{-j\hat{\omega}} + e^{-j2\hat{\omega}})$$

$$= (1 - e^{-j\hat{\omega}} + e^{-j2\hat{\omega}} - e^{-j3\hat{\omega}})(e^{-j\hat{\omega}} + e^{-j2\hat{\omega}})$$

$$\begin{aligned}
 &= e^{-j\hat{\omega}} - e^{-j2\hat{\omega}} + e^{-j3\hat{\omega}} - e^{-j4\hat{\omega}} \\
 &\quad + e^{-j2\hat{\omega}} - e^{-j3\hat{\omega}} + e^{-j4\hat{\omega}} - e^{-j5\hat{\omega}}
 \end{aligned}$$

$$\mathcal{H}_6(\hat{\omega}) = e^{-j\hat{\omega}} - e^{-j5\hat{\omega}}$$

$$\Rightarrow y[n] = x[n-1] - x[n-5]$$



### PROBLEM 6.18:

$$X[n] = 5 + 20 \cos\left(\frac{\pi}{2}n + \frac{\pi}{4}\right) + 10\delta[n-3]$$

Need  $\mathcal{H}(0)$       DEPENDS on  $\mathcal{H}(\pi/2)$       Need impulse response  $h[n]$

$$\begin{aligned}\mathcal{H}(0) &= (1-j)(1-(-j))(1+1) \\ &= (1-j)(1+j)2 = 2 \cdot 2 = 4\end{aligned}$$

$$\begin{aligned}\mathcal{H}(\pi/2) &= (1-j e^{-j\pi/2})(1+j e^{-j\pi/2})(1+e^{-j\pi/2}) \\ &= (1-j(-j))(1+j(-j))(1-j) \\ &= (1-1)(1+1)(1-j) = 0\end{aligned}$$

To find  $h[n]$ , multiply out  $\mathcal{H}(\hat{\omega})$

$$\begin{aligned}\mathcal{H}(\hat{\omega}) &= (1-j e^{-j\hat{\omega}} + j e^{-j\hat{\omega}} + e^{-j2\hat{\omega}})(1+e^{-j\hat{\omega}}) \\ &= (1+e^{-j2\hat{\omega}})(1+e^{-j\hat{\omega}}) \\ &= 1 + e^{-j\hat{\omega}} + e^{-j2\hat{\omega}} + e^{-j3\hat{\omega}}\end{aligned}$$

$$\Rightarrow h[n] = \delta[n] + \delta[n-1] + \delta[n-2] + \delta[n-3]$$

Finally,

$$\begin{aligned}y[n] &= 5(4) + 0 + 10h[n-3] \\ &= 20 + 10\delta[n-3] + 10\delta[n-4] + 10\delta[n-5] + 10\delta[n-6]\end{aligned}$$